


## 2.4 Maximum dimensions. **Slide & Swing New Wave Door**


The size of a door is limited in relation to the maximum load capacity of the hardware. It's also important to consider maximum allowable stresses and deformations from other influences such as wind pressure and thermal expansion. To withstand these loads, maintain profile straightness, assist in product transportation/installation and to provide localised support for mechanical fixings and enhancement of security **it's necessary to reinforce the PVC profiles regardless of span or colour**. Only reinforcement supplied by Deceuninck should be used, not using Deceuninck specified reinforcement could invalidate your warranty.

Maximum door height: 2.2m  
Minimum sash width: 0.6m  
Maximum sash width: 0.85m

Minimum overall door width:



Maximum overall door width per style:

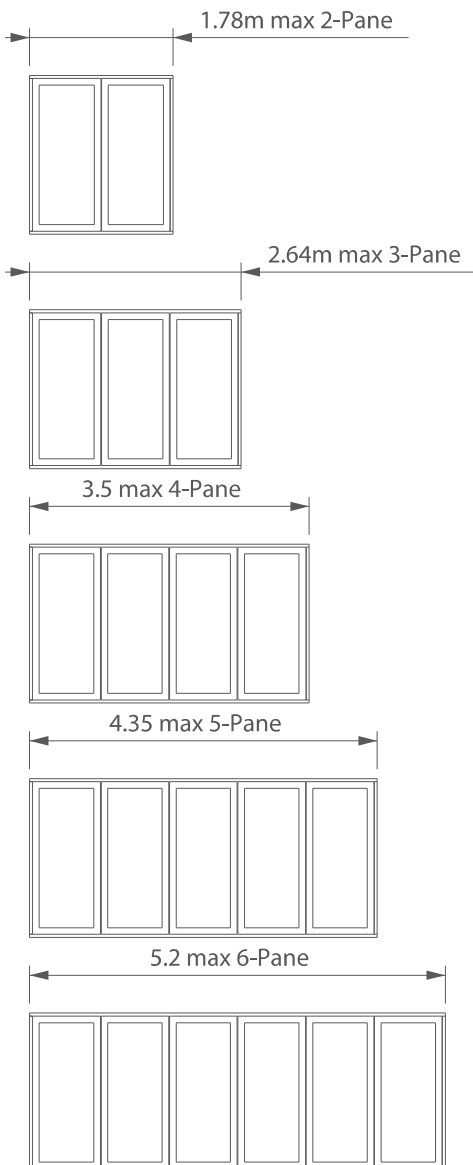

**Note**

- Maximum door/sash width sizes given are applicable to standard double glazing (2 x 4mm glass).
- For laminated glass or triple glazing the maximum sash width must be reduced to 0.7m**
- 2-Pane max door width 1.40m
- 3-Pane max door width 2.10m
- 4-Pane max door width 2.80m
- 5-Pane max door width 3.50m
- 6-Pane max door width 4.20m